

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
22 April 2004 (22.04.2004)


PCT

(10) International Publication Number
WO 2004/034073 A1

- (51) International Patent Classification⁷: **G01R 31/36, H02J 7/00**
- (21) International Application Number: **PCT/DK2003/000636**
- (22) International Filing Date:
29 September 2003 (29.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PA 2002 01511 8 October 2002 (08.10.2002) DK
- (71) Applicant (for all designated States except US): **OTICON A/S [DK/DK]; Strandvejen 58, DK-2900 Hellerup (DK).**
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **DANIELSEN, Finn [DK/DK]; c/o Oticon A/S, Strandvejen 58, DK-2900 Hellerup (DK).**
- (54) Agent: **POULSEN, Henning, Knak; Oticon A/S, Strandvejen 58, DK-2900 Hellerup (DK).**
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: METHOD OF CURRENT MANAGEMENT IN A BATTERY POWERED DEVICE AND BATTERY POWERED DEVICE

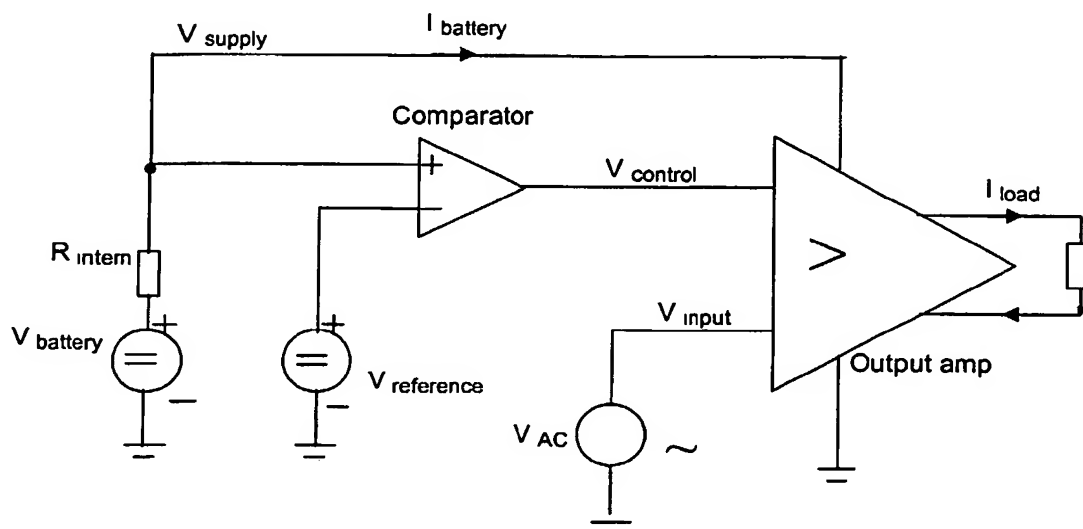

(57) Abstract: A method of current management in a battery powered device, the method comprising the following steps: a- comparing the actual supply voltage from the battery with a fixed reference voltage, b- generating a control signal whenever the supply voltage is below the reference voltage, c- use the control signal to reduce the load current in the battery powered device, whereby the supply voltage from the battery will increase, d- repeat steps a, b and c as long as the supply voltage is below the reference voltage. The invention thus provides a current management system that-when used within a hearing aid- will allow very high load currents and thereby high sound pressure levels to be obtained from the hearing aid. This is achieved without having severe problems with the reduced battery voltage when the battery approaches the end of its lifetime and/or if the air flow within the battery becomes insufficient.



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

TITLE

Method of current management in a battery powered device and battery powered device.

5

AREA OF THE INVENTION

The invention relates to the area of battery powered devices and more particularly the invention relates to the management of the power consumption of such devices. Such devices include hearing aids and similar small size battery powered electronic devices.

10

BACKGROUND OF THE INVENTION

One of the characteristics of the batteries used in a hearing aid is the relatively high internal impedance for this type of voltage source. Furthermore during the lifetime of the battery this impedance increases. As an example the internal impedance for a fresh battery may start at 1-2 Ohm (at 100 Hz) and increase to perhaps 10 Ohm at the end of the lifetime. Another and even worse problem is related to the most common battery type for hearing aids, namely the zinc-air battery. As the name implies one of the active ingredients for operation is air. The amount of air needed is dependent on the current supplied from the battery and if a certain current limit is exceeded the airflow through the inlets of the battery becomes insufficient. As a result the battery voltage starts to drop. To make it worse this current limit is not the same for different battery manufacturers and is also a function of time.

20

25

For some hearing aids the above weaknesses is a major problem. If the maximum current consumption from the hearing aid is being limited to a conservative magnitude in order to avoid problems with the battery voltage drop, the maximum sound pressure, which the hearing aid can supply will be clearly below the needs for some of the hearing impaired. Increasing the maximum current on the other hand will especially for modern hearing aids with an EEPROM memory give another problem.

30

For these hearing aids applies that if the battery voltage is below a certain limit, the settings of the hearing aid can not be guaranteed and a reset of the digital control circuit must be carried out – during which the hearing aid is inoperative. In other words some type of control within the hearing aid is needed, which will allow the hearing aid to profit from the high current, which the best zinc-air batteries can deliver, but on the other hand restricts the current demand from the hearing aid if the battery voltage starts to drop.

The objective is to provide a power consumption management method and a power consumption system that remedies these drawbacks of existing battery powered systems.

SUMMARY OF THE INVENTION

According to the invention the objective of the invention is achieved by means of the method as defined in claim 1.

By reducing the load current and at the same time monitoring the supply voltage, the output voltage from the battery will never go far below a chosen reference voltage. By using the feedback within the system the amount of load current reduction will never be more than what is precisely needed.

In a preferred embodiment as mentioned in claim 2 the device is an amplifier in a hearing aid, and the repetition frequency of monitoring- and load current deduction steps is higher than twice the highest audio frequency of the hearing aid. With the help of such a fast feedback- and monitoring system the current regulation can happen very quickly, and thereby any harmful side effects on the audio quality will remain small.

By setting the reference voltage above the critical supply voltage of the hearing aid, it is avoided, that the hearing aid resets before the end of the battery lifetime, which otherwise might happen, when the amplifier draws high currents from the battery.

In a preferred embodiment the battery is a zinc-air battery. A battery of this kind requires a supply of air and during periods of high current drain from the battery the air supply can become the limiting factor. This can cause voltage drops below the critical supply voltage and this is avoided with the invention.

Also in connection with the use of rechargeable batteries as stated in claim 5, the invention can be used. Rechargeable batteries may experience a drop in supply voltage, when large currents are drawn from the battery, and in this case the use of the invention in connection with a hearing aid will ensure, that no reset takes place.

The invention also concerns a battery powered device as claimed in claims 6-9.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 schematically shows the principles of the invention.

DESCRIPTION OF A PREFERRED EMBODIMENT

An example of a way to implement the invention is described in the following with reference to fig. 1

The load current I_{load} in the receiver is transformed to a current $I_{battery}$ taken from the battery. This current will generate a voltage loss due to the internal resistance R_{intern} and/or due to lack of air within the battery. If the supply voltage V_{supply} goes below a reference voltage $V_{reference}$, the comparator will now change its output state thereby generating a control signal $V_{control}$. This control signal $V_{control}$ is used to reduce the load current I_{load} from the output amplifier - ex. by temporarily disconnecting the load or receiver - then current taken from the battery $I_{battery}$ will decrease and V_{supply} will go up above $V_{reference}$. This in turn will change the output of the comparator and return the output amplifier to normal operation.

This sequence will be repeated as many times as necessary in order to prevent V_{supply} to go far below $V_{\text{reference}}$. The net result will be that the average current in the receiver (and thereby the battery current) will be restricted to a value, which the battery can
5 supply and at the same time the supply voltage will stay above or only slightly below the reference voltage. If this reference voltage is chosen to be above the critical supply voltage for proper operation of the digital control circuit of the hearing aid then a reset will not be necessary and the hearing aid will be able to operate almost normally with the only exception that the maximum output level will be reduced compared to an
10 ideal voltage source when the battery voltage drops. Due to the feedback in the system, the amount of reduction of the load current will never be more than what is precisely needed in order to keep the voltage supply at the reference voltage, and consequently the reduction in maximum output level will also be no more than what is needed to avoid that the hearing aid resets.

15 Due to the repetition of the sequence, this system can be considered to be a sampled system. By the use of a fast comparator the repetition frequency can be very much higher than twice the highest audio frequency of interest and thereby any harmful side effects on the audio quality will remain small.

20 The invention thus provides a current management system that - when used within a hearing aid - will allow very high load currents and thereby high sound pressure levels to be obtained from the hearing aid. This is achieved without having severe problems with the reduced battery voltage when the battery approaches the end of its
25 lifetime and/or if the air flow within the battery becomes insufficient.

An advantageous side effect of this system will be an extension of the effective lifetime of the battery, as the hearing aid is now able to operate down to very low load currents without any audible side effects other than a somewhat reduced maximum
30 output. This of course compared to a corresponding hearing aid without such a system.

CLAIMS

1. Method of current management in a battery powered device, the method
5 comprising the following steps:
 - a- comparing the actual supply voltage from the battery with a fixed reference voltage,
 - b- generating a control signal whenever the supply voltage is below the reference voltage,
 - 10 c- use the control signal to reduce the load current in the battery powered device, whereby the supply voltage from the battery will increase,
 - d- repeat steps a,b and c as long as the supply voltage is below the reference voltage.
- 15 2. Method as claimed in claim 1, wherein the battery powered device is an amplifier in a hearing aid, and whereby the repetition frequency of steps a,b and c is higher than the highest audio frequency of the hearing aid.
3. Method as claimed in claim 2 where the reference voltage is above a critical
20 supply voltage of the hearing aid.
4. Method of current management as claimed in claim 1 or 2, wherein the battery is a zinc-air battery.
- 25 5. Method of current management as claimed in claim 1 or 2, wherein the battery is a rechargeable battery.
6. Battery powered device with a battery giving a supply voltage to the device,
whereby means are provided for generating a fixed reference voltage and
30 means for comparing the supply voltage with the reference voltage, and where the comparing means are arranged to deliver a control signal to the device whenever the supply voltage is below the reference voltage, and where the

device has means for reducing its current load at the receipt of the control signal.

- 5 7. A battery powered device as claimed in claim 6, where the device is an output amplifier in a hearing aid, and where the comparing means are arranged to conduct the comparing at a repetition frequency, which is above the highest audio frequency of the hearing aid.
- 10 8. A battery powered device as claimed in claim 6, where the battery is a zinc-air battery.
9. A battery powered device as claimed in claim 6, where the battery is a rechargeable battery.

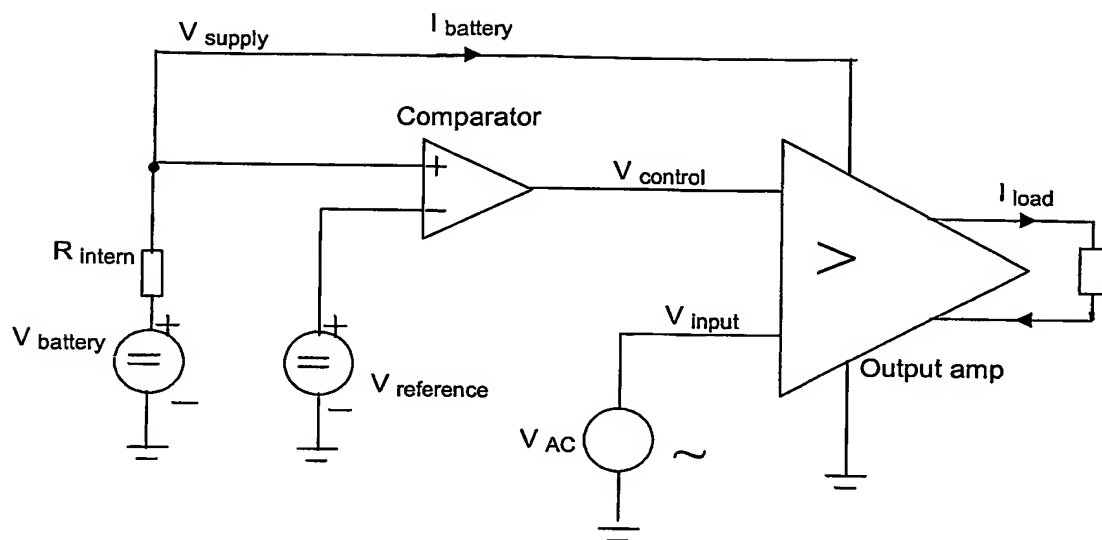


FIG. 1

INTERNATIONAL SEARCH REPORT

International Application No

PCT/DK 03/00636

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 G01R31/36 H02J7/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 G01R H02J H02H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 188 142 B1 (LOTH-KRAUSSER HARTMUT) 13 February 2001 (2001-02-13) column 1, line 53 - line 65 column 6, line 18 - line 32 column 6, line 38 - line 42 ---	1-9
A	US 5 619 126 A (LANG GERHARD) 8 April 1997 (1997-04-08) column 2, line 57 - column 3, line 21 -----	1-9

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

27 January 2004

Date of mailing of the international search report

11 FEB 2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

TOMAS ERLANDSSON/MN

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/DK 03/00636

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6188142	B1	13-02-2001	DE 19637574 A1	26-03-1998
			AT 208968 T	15-11-2001
			CN 1230303 A ,B	29-09-1999
			DE 59705411 D1	20-12-2001
			WO 9811644 A1	19-03-1998
			EP 0925626 A1	30-06-1999
			ES 2167788 T3	16-05-2002
			JP 2001500355 T	09-01-2001

US 5619126	A	08-04-1997	DE 4241066 C1	13-01-1994
			AT 142056 T	15-09-1996
			DE 59303598 D1	02-10-1996
			WO 9414229 A1	23-06-1994
			EP 0672316 A1	20-09-1995
			HK 50597 A	25-04-1997
			JP 8504319 T	07-05-1996
